

ORGANIZING COMMITTEE - COMITÉ ORGANIZADOR

C/ Pepe García Fajardo, 14, puerta 18 - 35012 - Las Palmas - Islas Canarias - España - Tlf.: +34 669150412

www.rallyislascanarias.com secretaria@rallyislascanarias.com

REMINDER / 2017 REGULATIONS / VALID AS FROM 1/01/2017

Article 253-6 : **SAFETY HARNESSES FOR WRC CARS:**

Harnesses in compliance with FIA 8853-2016 standard

Compulsory for the following cars :

- World Rally Cars homologated before 31.12.2013 in compliance with homologation extension 100/01 KSR as well as with its WR extension, and with Art. 255A of 2013 Appendix J.
- World Rally Cars homologated as from 01.01.2014 in compliance with homologation extension 200/01 WRC and with Art. 255A of 2016 Appendix J.
- World Rally Cars homologated as from 01.01.2015 in compliance with homologation extension 300/01 WRC and with Art. 255A of 2016 Appendix J.
- World Rally Cars homologated as from 01.01.2017 in compliance with homologation extension 400/01 WRC and with Art. 255A of Appendix J.
- Super 2000 (Circuits) cars in compliance with Art. 263 of Appendix J.

Compulsory as from 01.01.2018 for the following cars :

- Super 2000 (Rallies) cars in compliance with Art. 255A of 2013 Appendix J.
- Group RGT cars in compliance with Art. 256 of Appendix J.
- Group R5 cars in compliance with Art. 261 of Appendix J.

For other cars :

Recommended, compulsory as from 01.01.2023.

Technical list n°57 is available on the following link :

<http://www.fia.com/regulation/category/761>

Article 253-7 : **EXTINGUISHERS – EXTINGUISHING SYSTEMS:**

In rallies :

Articles 7.2 and 7.3 apply.

Extinguishing systems and Manual extinguishers in compliance with FIA Standard 8865-2015 (Technical List n°52) are recommended.

Extinguishing systems in compliance with FIA Standard 8865-2015 (Technical List n°52) are compulsory for the following cars :

ORGANIZING COMMITTEE - COMITÉ ORGANIZADOR

C/ Pepe García Fajardo, 14, puerta 18 - 35012 - Las Palmas - Islas Canarias - España - Tlf.: +34 669150412
www.rallyislascanarias.com secretaria@rallyislascanarias.com

- **World Rally Cars** homologated before 31.12.2013 in compliance with homologation extension 100/01 KSR and with its WR extension, as well as with Art. 255A of 2013 Appendix J.
- **World Rally Cars** homologated as from 01.01.2014 in compliance with homologation extension 200/01 WRC and with Art. 255A of Appendix J.
- **World Rally Cars** homologated as from 01.01.2015 in compliance with homologation extension 300/01 WRC and with Art. 255A of 2016 Appendix J.
- **World Rally Cars** homologated as from 01.01.2017 in compliance with homologation extension 300/01 WRC and with Art. 255A of Appendix J.
- **Super 2000 (Rallies) cars** in compliance with Art. 255A of 2013 Appendix J.
- **Group RGT cars** in compliance with Art. 256 of Appendix J.
- **Group R5 cars** in compliance with Art. 261 of Appendix J.

Technical list n°52 is available on the following link :
<http://www.fia.com/regulation/category/761>

Article 253-8.3.5 : **PROTECTIVE PADDING:**


Where the occupants' bodies could come into contact with the safety cage, flame retardant padding must be provided for protection.

All tubes of the cage identified on Drawing 253-68 and all roof reinforcements must be fitted with paddings in compliance with FIA standard 8857-2001 type A (see Technical List n°23).

Each padding must be fixed in such a way that it is not moveable from the tube.

Application : For all categories.

For competitions without co-driver, paddings are compulsory on driver's side only.



253-68

Technical list n°23 is available on the following link :
<http://www.fia.com/regulation/category/761>

ORGANIZING COMMITTEE - COMITÉ ORGANIZADOR

C/ Pepe García Fajardo, 14, puerta 18 - 35012 - Las Palmas - Islas Canarias - España - Tlf.: +34 669150412
www.rallyislascanarias.com secretaria@rallyislascanarias.com

ANTI-TORPEDO TABS

Article 253-7.2 : EXTINGUISHERS – Systems mounted:

It must be secured by a minimum of 2 screw-locked metallic straps and the securing system must be able to withstand a deceleration of 25 g.

Anti-torpedo tabs are required.

Article 253-7.3 : Manual extinguishers


All extinguishers must be adequately protected.

Their mountings must be able to withstand a deceleration of 25 g.

Furthermore, only quick-release metal fastenings (two minimum), with metal straps, are accepted.

Anti-torpedo tabs are required

See below an example of anti-torpedo device:

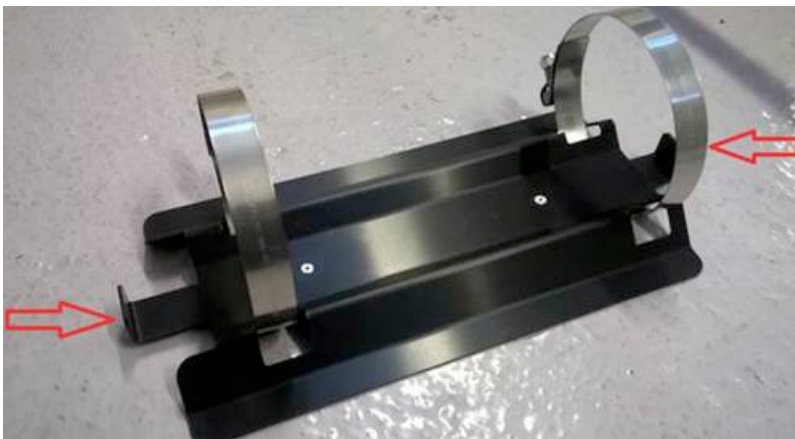



ORGANIZING COMMITTEE - COMITÉ ORGANIZADOR

C/ Pepe García Fajardo, 14, puerta 18 - 35012 - Las Palmas - Islas Canarias - España - Tlf.: +34 669150412
www.rallyislascanarias.com secretaria@rallyislascanarias.com

Maintenance on all Extinguisher mounted system:

Maintenance on Extinguisher mounted system: must be done as specified in the specific instruction manual (see Technical list n°16 and n°52)

ORGANIZING COMMITTEE - COMITÉ ORGANIZADOR

C/ Pepe García Fajardo, 14, puerta 18 - 35012 - Las Palmas - Islas Canarias - España - Tlf.: +34 669150412
www.rallyislascanarias.com secretaria@rallyislascanarias.com

ARTICLE 253-13 : **GENERAL CIRCUIT BREAKER** / ALL COMPETITORS

The general circuit breaker must cut all electrical circuits, battery, alternator or dynamo, lights, hooters, ignition, electrical controls, etc.) and must also stop the engine.

For Diesel engines having no electronically controlled injectors, the circuit breaker must be coupled with a device cutting off the intake into the engine.

It must be a spark-proof model, and must be accessible from inside and outside the car.

As for the outside, the triggering system of the circuit breaker must compulsorily be situated at the lower part of the windscreen mountings for closed cars. It must be marked by a red spark in a white-edged blue triangle with a base of at least 12 cm.

This outside triggering system only concerns closed cars.

Application :

Compulsory fitting for all cars taking part in speed races on circuits, **in rallies** or hill-climbs.

The fitting is recommended for other competitions.

ARTICLE 261-304-2 : **POP-OFF VALVES, R5 CARS:**

The homologated FIA boost control system (pop-off valve, see FIA Technical list n°43) must be fitted on the FIA pipe as described on the homologation form.

Its mounting must be carried out in such a way that two screws have to be entirely removed in order to be able to separate it from the FIA pipe.

These screws may be sealed by the scrutineers.

Technical list n°43 is available on the following link :

<http://www.fia.com/regulation/category/761>

Pop-Off valves + Inserts for R5 cars:

As from 1/01/2016, an additional insert is compulsory to be used with R5 pop-off valves (see technical list n°43).



ORGANIZING COMMITTEE - COMITÉ ORGANIZADOR

C/ Pepe García Fajardo, 14, puerta 18 - 35012 - Las Palmas - Islas Canarias - España - Tlf.: +34 669150412
www.rallyislascanarias.com secretaria@rallyislascanarias.com

R1 / R2 / R3 / R5 : Availability of parts

For information, the following condition applies to **all R1/R2/R3/R5** cars and is published in each Homologation Form :

**TOUTES LES COMPOSANTS SPECIFIQUES POUR LA COMPETITION
HOMOLOGUES ET FIGURANT DANS LES EXTENSIONS SUS MENTIONNEES
DOIVENT ETRE INDIVIDUELLEMENT DISPONIBLES A LA VENTE
S'ILS SONT DISPONIBLES EN TANT QUE COMPOSANT SEPRE**

**ALL SPECIFIC MOTORSPORT COMPONENTS
HOMOLOGATED AND FEATURING IN THE EXTENSIONS MENTIONED ABOVE
MUST BE INDIVIDUALLY AVAILABLE FOR PURCHASE
IF AVAILABLE AS A SEPARATE COMPONENT**

Club Deportivo Todo Sport G-76261825

